


Rotonics Cone Bottom Tanks

www.rototonics.com/tanks/RMIG/Cone.htm

RMI-G

- Available in Crosslink Polyethylene or FDA approved High Density Linear Polyethylene (ANSI/NSF Standard 61).
- These heavy duty tanks are used for mixing, settling, and storage of dry materials, as well as highly viscous solutions, up to 16.5 lbs./gallon.
- Basic stands are equipped with forklift channels.

- Seamless, one piece construction.
- Installed inlets and outlets are available to fit certain specifications.
- Impact and corrosion resistant.
- Optional mixer mounts and pump platforms are available.

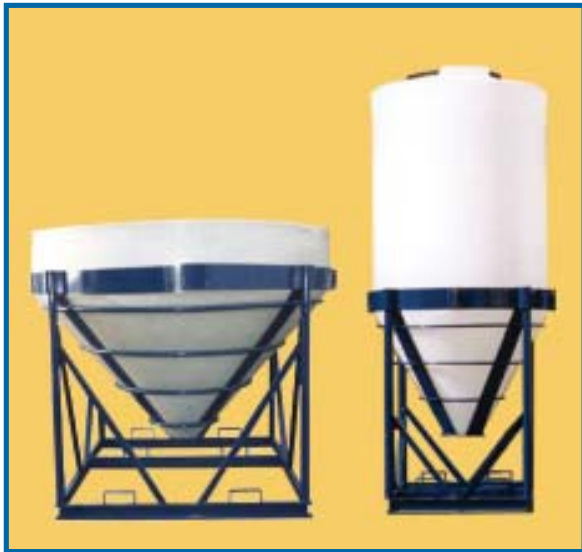

Open Top

Item#	Size (Gal.)	Dia. (In.)	Ht. (In.)	Ht. w/Stand (In.)	Degree of Slope
6501	920	90	63	76	50
6506	1440	90	79	92	50
6511	2175	90	106	119	50
6516	2900	90	136	149	50

Dome Top

Item#	Size (Gal.)	Dia. (In.)	Ht. w/Lid (In.)	Ht. w/Stand (In.)	Lid (In.)	Degree of Slope
6475	55	32	33	53	8/16*	60
6485	115	32	51	71	8/16*	60
6490	175	32	69	88	8/16*	60
6495	230	32	86	106	8/16*	60
6496	500	52	83	103	24	60
6497	700	52	110	130	24	60
6500**	1100	90	77	90	16	50
6505**	1600	90	96	109	16	50
6510**	2300	90	123	136	16	50
6515**	3000	90	149	162	16	50

*Larger Lid Optional

**Molded-in lifting lugs available upon request.

Slope Bottom

Item#	Size (Gal.)	Ht. w/Lid (In.)	Ht. w/Stand (In.)	Width (In.)	Length (In.)	Lid (In.)
6518	350	74	97	38	40	16
6519	400	83	106	38	40	16

Limited Tank Warranty: RMI warrants to the original purchaser all tanks manufactured by RMI to be free from defects in material and workmanship for a period of five (5) years from date of manufacture, with the exception of D.O.T. and Septic Tanks, which have a special warranty. The Guido Tanks also have a (5) year warranty. **Review the chemical resistance guide and warranty instruction information prior to the installation and use of RMI Tanks. Hard-plumbing of tanks is not recommended due to the expansive/contractive characteristics of Polyethylene. All weights, dimensions, and gallowage markers are approximate.**

Fred C. Gilbert Co.
106 Norris Road
Bakersfield, Ca. 93308
661-399-9569
fax 661-393-9654

Quality Products and Exceptional Service